

SPDCPOE05

Power over ethernet 10 W module

Preliminary data

Features

- Input voltage range: 38.5 V to 60 V
- 10 W output
- Based on ST devices integrating standard PoE interface and current mode PVM controller
- IEEE 802.3af compliant (PoE standard)
- Class 0 (zero), 0-12.96 W input
- Output voltage 5 V
- Output current 2 A
- Output voltage ± 5 %
- Ripple 1 % rms
- Transient response ±5 %, ½ load to full load
- Operating temperature range -40 °C to 70 °C
- Input transient suppressor
- Under voltage lockout
- Soft-start
- Short circuit protection
- 1500 VDC input/output insulation
- Input and output will be remally maintained within SELV lim?
- Very compact size, about 86x24.2x17 mm
- Vertical Tr:1 package
- RoHS compliant
- CL 94V-0 flammability



Applications

- The larget applications are small low power remote IP appliances.
- Security system, doors access, cameras, alarms
- Displays
- Public address systems
- Wireless access point
- Environmental control
- Telemetry
- Remote environmental monitoring

Table 1. Device summary

Order code	Nominal input voltage	Nominal output voltage	Max efficiency	Nominal power
SPDCPOE05	48 V	5 V	80 %	10 W

Description SPDCPOE05


1 Description

SPDCPOE05 is a power module specifically designed to provide an isolated, low-voltage power source to a remote powered device (PD) in power over ethernet (PoE) applications. SPDCPOE05 has full functional compliance with IEEE802.3af. It is designed to extract power from Ethernet cable when sourced by power sourcing equipment (PSE) also conforming to IEEE802.3af. SPDCPOE05 is rated 10 W and incorporate PD detection and PD classification current signatures required for the PSE. The module is compatible with PD classifications class 0. In addition to a fully integrated DC-DC converter, each SPDCPOE05 power module incorporates internal input diode bridges to support both data line and spare line pair standard ethernet connections, a transient suppressor for input over-voltage protection, and an EMI filter to ensure noise compatibility with Ethernet data signals. Other features include: input under voltage lockout (UVLO), soft-start, over-current and short-circuit protection.

Table 2. Pin description

Table 2.	Pin description		<u> </u>
No	Pin name	I/O	L excription
J1-1	TX +	I	Ethernet in data line
J1-2	TX -	I	Ethernet in data line
J1-3	RX +	I	Ethernet in data line
J1-4	SP1	÷ C	Ethernet in spare line
J1-5	SP1		Ethernet in spare line
J1-6	RX -	I	Ethernet in data line
J1-7	SP2	I	Ethernet in spare line
J1-8	243	I	Ethernet in spare line
J2-1	TD+	0	Ethernet out data line
J2- ₁ ,	TD -	0	Ethernet out data line
J2-3	RD +	0	Ethernet out data line
J2-4		n.c.	
J2-5		n.c.	
J2-6	RD-	0	Ethernet out data line
J2-7		n.c.	
J2-8		n.c.	
J3-1	Vout +	0	Power output +5 Volt
J3-2	Vout +	0	Power output +5 Volt
J3-3	Vout -	0	Power output 0 Volt
J3-4	Vout -	0	Power output 0 Volt
	No J1-1 J1-2 J1-3 J1-4 J1-5 J1-6 J1-7 J1-8 J2-1 J2-7 J2-8 J2-6 J2-7 J2-8 J3-1 J3-2 J3-3	No Pin name J1-1 TX + J1-2 TX - J1-3 RX + J1-4 SP1 J1-5 SP1 J1-6 RX - J1-7 SP2 J1-8 SF2 J2-1 TD + J2-2 TD - J2-3 RD + J2-4 J2-5 J2-6 RD- J2-7 J2-8 J3-1 Vout + J3-2 Vout -	No Pin name I/O J1-1 TX + I J1-2 TX - I J1-3 RX + I J1-4 SP1 ; J1-5 SP1 I J1-6 RX - I J1-7 SP2 I J1-8 S+2 I J2-1 TD + O J2-1 TD + O J2-1 TD - O J2-2 RD + O J2-3 RD + O J2-4 n.c. n.c. J2-5 n.c. n.c. J2-7 n.c. n.c. J2-8 n.c. n.c. J3-1 Vout + O J3-3 Vout - O

2 Typical configuration

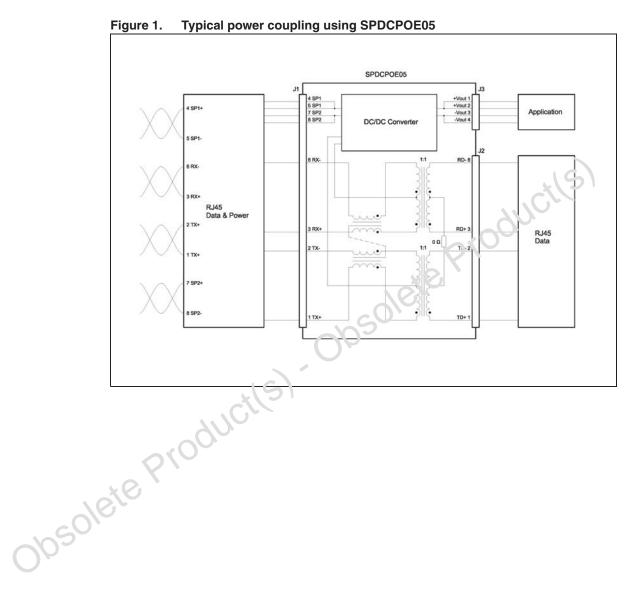

47/

Mechanical data SPDCPOE05

3 Mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

Figure 2. Mechanical dimensions


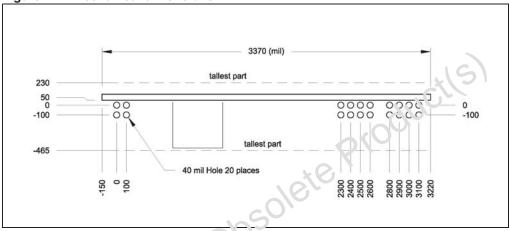


Figure 3. Footprint

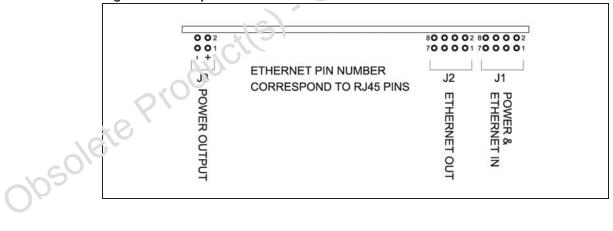

SPDCPOE05 Revision history

4 Revision history

Table 3. Document revision history

Date	Revision	Changes
03-Mar-2009	1	Initial release

Obsolete Product(s). Obsolete Product(s)

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidia. 'e. ('ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and senices described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and solvices Jescribed herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services telegrapherein.

No license, express or implied, by estoppel or otherwise, to any intellectual property i.g. is s granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a licer se grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a wa ranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained in the since the services or any intellectual property contained in the services of the s

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN VIRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR W. RRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PROD IC 'S OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PF OP ENTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of S.T. or Jcts with provisions different from the statements and/or technical features set forth in this document shall immediately void any war ani rigranted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liabi.", \taΓ.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

6/6 Rev 1

